



**PH300-1XX-XXX**

Pin Header ——— Type1/Type2  
 Pitch 3.00mm ———  
 Single Row ——— No. of Pins  
 Single Row: 1~40

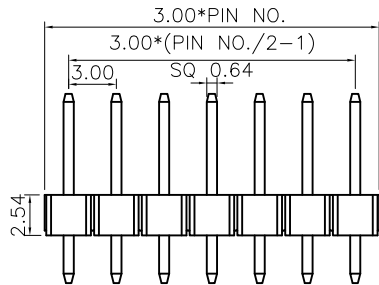




DIM A	DIM B	DIM C	DIM D	DIM E
5.00	3.00	8.00	5.00	3.00
.....	.....	.....	.....	.....

产品规范 PRODUCT SPECIFICATION

1. 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
3. 端子电镀 FINISH : GOLD OR TIN PLATED.
4. 额定电流 CURRENT RATING : 3 AMPERE.
5. 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
6. 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;  
测试后 Final : 40 m Ohm Max. .
8. 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
<p>THIRD ANGLE PROJECTION</p>		CHEK	08Jan2016		
		APVD Abel	08Jan2016	SIZE A4	
		PRODUCT SPEC	—	DRAWING No. YL-ED-XXX	
		WEIGHT	—	SCALE 1 : 1	SHEET 1 of 1
		CUSTOMER DRAWING			

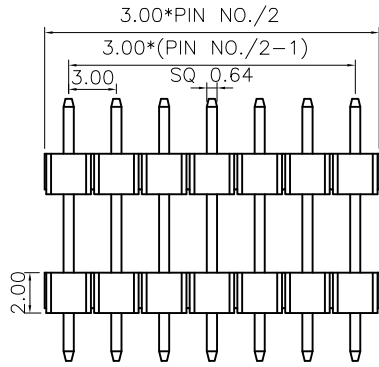

### PH300-2XX-XXX


Pin Header — Type1/Type2  
 Pitch 3.00mm — .....  
 Dual Row — No. of Pins  
 Dual Row: 2~40

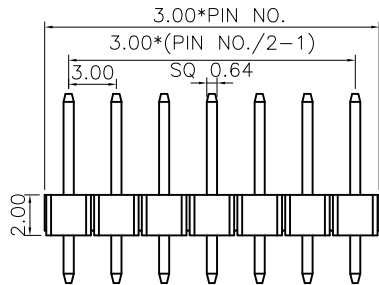

DIM A	DIM B	DIM C	DIM D	DIM E
5.00	3.00	8.00	5.00	3.00
.....	.....	.....	.....	.....

#### 产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED.
- 额定电流 CURRENT RATING : 3 AMPERE.
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;  
测试后 Final : 40 m Ohm Max. .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
 THIRD ANGLE PROJECTION		CHEK	08Jan2016		
		APVD Abel	08Jan2016	SIZE A4	
		PRODUCT SPEC	—	DRAWING No. YL-ED-XXX	
		WEIGHT	—	SCALE 1 : 1	SHEET 1 of 1
		CUSTOMER DRAWING			