

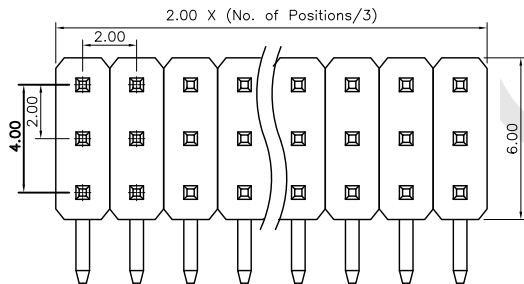




### PH200-XXX-XXX

Pin Header Type1/Type2  
 Pitch 2.00mm .....  
 3:Three Row No.of Pins  
 2: Dual Row Three Row:3~40  
 1:Single Row Dual Row:2~40  
 Single Row:1~52

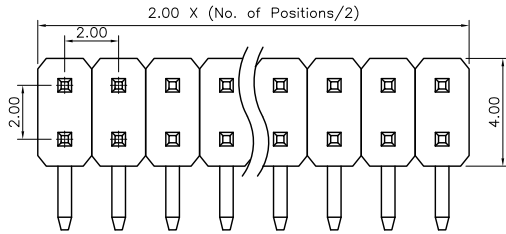


#### 产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED.
- 额定电流 CURRENT RATING : 2 AMPERE.
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;  
测试后 Final : 40 m Ohm Max. .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
3.90	2.80	2.80	6.00	1.00	1.50
7.00	3.00	6.50	6.50	1.50	2.00
.....	.....	.....	.....	2.00	

THIS DRAWING IS A CONTROLLED DOCUMENT.



THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.50
1 PLC	± 0.30
2 PLC	± 0.20
3 PLC	± 0.15
4 PLC	± -

ANGLES ± 3'

DWN 08Jan2016

CHEK 08Jan2016

APVD Abel 08Jan2016

PRODUCT SPEC

WEIGHT

CUSTOMER DRAWING

东莞市宇亮电子有限公司

DONG GUAN YU LIANG ELECTRONICS CO.,LTD

NAME

Pin Header 2.00mm Right Angle Type

SIZE

A4

DRAWING No.

YL-ED-XXX

SCALE 1 : 1

SHEET 1 OF 1