
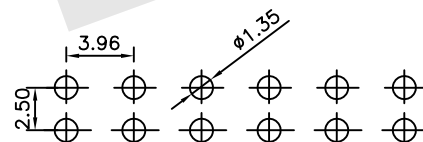


### FH396-1XX-XXX

Female Header  
Pitch 3.96mm  
Single Row





Type1/Type2  
.....  
No.of Pins  
Single Row:2~20



#### PRODUCT SPECIFICATION

1. INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. TERMINAL MATERIAL : COPPER ALLOY .
3. FINISH : GOLD OR TIN PLATED.
4. CURRENT RATING : 7 AMPERE.
5. INSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;  
测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	0801192016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
 THIRD ANGLE PROJECTION		CHEK	08Jan2016		
		APVD	Abel 08Jan2016	SIZE	DRAWING No.
		PRODUCT SPEC	—	A4	YL-ED-XXX
		WEIGHT	—	CUSTOMER DRAWING	SCALE 1 : 1
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± — ANGLES ± 3°					

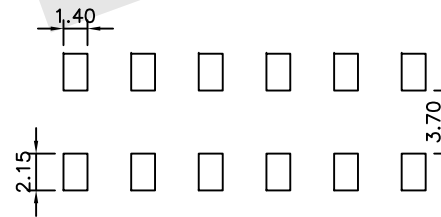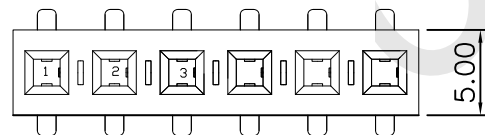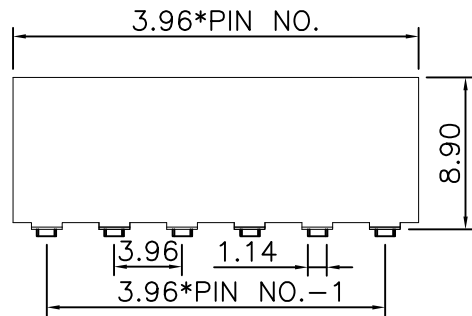

### FH396-1XX-XXX

Female Header  
 Pitch 3.96mm  
 Single Row

Type1/Type2  
 .....  
 No.of Pins  
 Single Row:2~20

#### PRODUCT SPECIFICATION

- 1.INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 2.TERMINAL MATERIAL : COPPER ALLOY .
- 3.FINISH : GOLD OR TIN PLATED.
- 4.CURRENT RATING : 7 AMPERE.
5. NSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;  
 测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08012016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD			
 THIRD ANGLE PROJECTION		CHEK 08Jan2016			NAME Female Header 3.96mm SMT Type	
		APVD AbeI 08Jan2016	SIZE A4	DRAWING No. YL-ED-XXX		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC —	WEIGHT —	SCALE 1 : 1
		0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		CUSTOMER DRAWING	SHEET 1 OF 1	