




FH254-2XX-XXX

Female Header | Type1/Type2
 Pitch 2.54mm |
 Dual Row | No.of Pins
 Dual Row:2~40

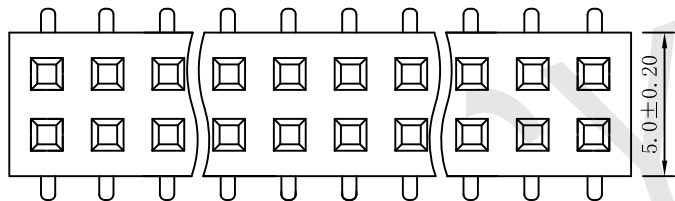

PRODUCT SPECIFICATION

- 1.INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 2.TERMINAL MATERIAL : COPPER ALLOY .
- 3.FINISH : GOLD OR TIN PLATED.
- 4.CURRENT RATING : 3 AMPERE.
5. NSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
 测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

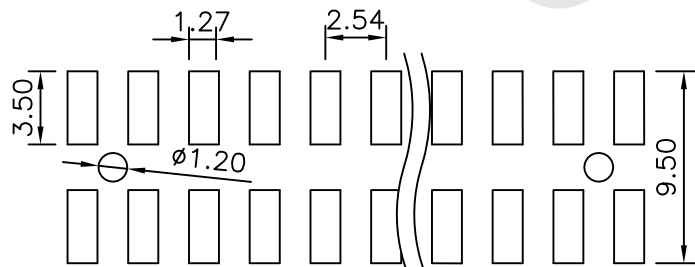

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 0801092016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK 08Jan2016		
 THIRD ANGLE PROJECTION		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		NAME Female Header 2.54mm*8.50mm Dual Row SMT Type
		APVD Abel 08Jan2016 PRODUCT SPEC - WEIGHT - CUSTOMER DRAWING		DRAWING No. YL-ED-XXX SCALE 1 : 1 SHEET 1 of 1