
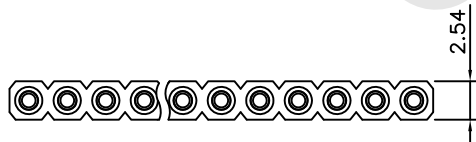


YL014-XXX-XXX

Machine Pin

\*\*\*\*\*

Single Row	Dual Row
002:02Pin	004:04Pin
003:03Pin	006:06Pin
*****	*****
040:40Pin	080:80Pin



产品规范 PRODUCT SPECIFICATION

1. 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
3. 端子电镀 FINISH : GOLD OR TIN PLATED .
4. 额定电流 CURRENT RATING : 3 AMPERE .
5. 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN .
6. 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE .
7. 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;  
测试后 Final : 40 m Ohm Max. .
8. 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C .

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK	08Jan2016		
<p>THIRD ANGLE PROJECTION</p>		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± 0.50	Machine Female Header 2.54mm H:7.43mm	
		1 PLC	± 0.30	DIP Type	
		2 PLC	± 0.20	SIZE	DRAWING No.
3 PLC	± 0.15	PRODUCT SPEC	A4	YL014-XXX	
4 PLC	± -	WEIGHT	-	SCALE	1 : 1
ANGLES	± 3'	CUSTOMER DRAWING	-	SHEET	1 OF 1