
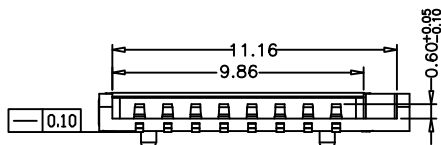




Recommended P.C.B Layout(Tolerance=±0.05)  
AS VIEW FORM COMPONENT SIDE

注意：此方框内填充处为端子触点对应PCB位置，PCB此处建议不设置线路。

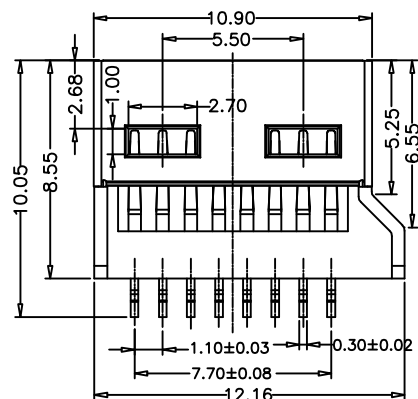

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	09Jan15	AW	WK

NOTES:

- MATERIAL:
  - Housing: LCP UL94V-0,
  - Terminal: Phosphor Bronze, Gold plated, underplated Nickel
  - Shell: SUS, Soldering pin Gold plated, underplated Nickel
- SPECIALITY:
  - Rated Current: 0.5A
  - Contact Resistance: 50mΩ Max
  - Insulation Resistance: 100MΩ Min 100V DC
  - Dielectric Withstanding Voltage: 100V AC
  - Solderability: 235±5°C; 5±0.5s
  - Pin retention force; 0.35kgf MIN
  - Durability: 5000 cycles
  - heat resistance test: 250±5°C, 2 min.
  - Operating Condition: Temperature: -30°C~+80°C; Humidity: 80%R.H MAX

YL004-011-001  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 09Jan2015	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD
DIMENSIONS: mm		CHEK S. CHIEN 09Jan2015	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel 09Jan2015	MICRO SD CARD 超薄简易型 带定位柱 H=1.5MM
THIRD ANGLE PROJECTION		PRODUCT SPEC — WEIGHT —	SIZE A4
		CUSTOMER DRAWING	DRAWING No. YL004-011
		SCALE 1 : 1	SHEET 1 of 1